


D210x (B/E/C/S/R/K/L)

NB 32 – NB 500



- ▶ **Type D210x** (B/E/C/S/R/K/L)
without vacuum support ring
- ▶ **Type D211x** (B/E/C/S/R/K/L)
with internal vacuum support ring




Lateral expansion joint with one arch

Design:	Single-arch rubber bellows with self-sealing rubber bulges and backing flanges with threaded holes and tie rods
Nominal diameters:	NB 32 to NB 500
Installation length:	$L_E = 100$ or 110 mm (▶ page 224–225)
Pressure:	Depending on the nominal diameter up to 25 bar Vacuum-proof up to max. 0.8 bar absolute, with vacuum support ring up to 0.05 bar absolute Design in accordance with Pressure Equipment Directive PED 97/23/EC
Movement:	For lateral movements (▶ page 224–225)

Application:

Cooling water systems, desalination plants, drinking water supply, plant construction, e. g. in pipelines, on pumps, as dismantling joints, on condensers and vessels



Rubber bellows

Rubber grades			Carrier
up to 110 °C:	EPDM	Hot water, very high-temperature water dilute chlorine compounds	Nylon fabric Nomex fabric
up to 90 °C:	IIR, drinking water approved	Drinking water, hot water, cold water, seawater, wastewater	
	CSM	Strong acids, bases, chemicals	
	NBR	City gas, natural gas, fuels, lubricants	
up to 80 °C:	NBR, bright, food grade	Oil, fatty foods	

Flanges

- Design:** Single-part backing flanges with threaded holes, groove to accommodate the rubber bulges and holder for tie rods (control unit type B, E, C, S)
Single-part, round backing flanges with threaded holes, groove to accommodate the rubber bulges and control unit plates (control unit type R, K, L)
- Flange norms:** DIN, ANSI, AWWA, BS, JIS, special measurements (▶ page 280)
- Materials:** Carbon steel: 1.0038 (S235JRG2)
Other materials on request
- Coating:** Galvanised, yellow-neutralized

Optional accessories

- Protective hood:** UV protection cover
Ground protective cover
Fire protection cover
(▶ page 50)
- Flow liners:** Cylindrical flow liner
Conical flow liner
Telescoping flow liner
(▶ page 49)


Tie rods




Design: Dimensioning according to design pressure (test pressure) based on the Pressure Equipment Directive

Materials: Carbon steel in strength class 8.8 or stainless steel


Coating: Spherical bearings and ball disks PTFE-coated
Tie rods galvanised or hot-dip galvanised




Type D210B
Tie rods mounted outside in rubber bushing to accommodate reaction forces in the event of pressure (up to NB 300)




Type D210R
Control unit plates: Tie rods mounted outside in rubber bushing to accommodate reaction forces in the event of pressure (up to NB 300)




Type D210E
Tie rods mounted outside in spherical bearings and ball disks to accommodate the reaction forces in the event of pressure




Type D210K
Control unit plates: Tie rods mounted outside in spherical bearings and ball disks to accommodate the reaction forces in the event of pressure



Type D210C
Tie rods mounted outside in rubber bushing and inside in the thrust limiter to accommodate stresses in the event of pressure and vacuum (up to NB 300)





Type D210L
Control unit plates: Tie rods mounted outside and inside in spherical bearings and ball disks to accommodate the reaction forces in the event of pressure and vacuum



Type D210S
Tie rods mounted outside in spherical bearings and ball disks and inside in thrust limiters to accommodate stresses in the event of pressure and vacuum

Support rings


TYPE		Vacuum support ring	Pressure	Movement
D210x (B/E/C/S/ R/K/L)		Without	Depending on the nominal diameter up to 25 bar, for vacuum up to 0.8 bar absolute	▶ page 224
D211x (B/E/C/S/ R/K/L)		Vacuum support ring spiral, medium contact, inside the arch apex	Depending on the nominal diameter up to 25 bar, for vacuum up to 0.05 bar absolute	▶ page 225


Materials

Stainless steel: 1.4310 (X12 CrNi 17 7)

Other materials on request

Planning help D210S

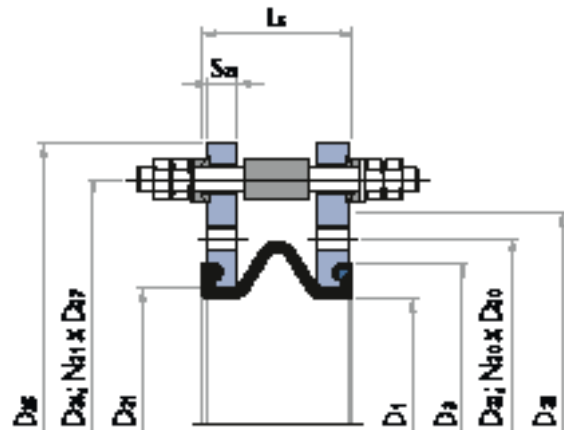



D210x (B/E/C/M/R/K/L)

▶ without vacuum support ring


Installation length (L_E) at design pressure										
NB	up to 10 bar $L_E = 100$ mm					up to 10 bar $L_E = 110$ mm				
	higher pressures on request									
	Movement				A	Movement				A
	mm	mm	\pm mm	\pm°	cm ²	mm	mm	\pm mm	\pm°	cm ²
32	30	20	30	0	18					
40	30	20	30	0	18					
50	30	20	30	0	35					
65	30	20	30	0	56					
80	30	20	30	0	87					
100	30	20	30	0	130					
125	30	20	30	0	190					
150	30	20	30	0	263					
175	30	20	30	0	334					
200	30	20	30	0	416					
250	30	20	30	0	607					
300	30	20	30	0	830					
350	30	20	30	0	1,100					
400						30	20	30	0	1,385
500						30	20	30	0	2,091

Recommended sizes

In the event of lateral displacement and simultaneous axial extension (due to installation gap tolerance) the above movements are reduced (▶ page 29).




Universal expansion joint, type D110A
in a GRP-pipe
NB 250, 16 bar



Installation length (L_E) at design pressure										
	up to 10 bar $L_E = 100$ mm					up to 10 bar $L_E = 110$ mm				
	higher pressures on request									
NB	Movement				A cm ²	Movement				A cm ²
	mm	mm	±mm	±°		mm	mm	±mm	±°	
32	30	5	20	0	18					
40	30	5	20	0	18					
50	30	5	20	0	35					
65	30	5	20	0	56					
80	30	5	20	0	87					
100	30	5	20	0	130					
125	30	5	20	0	190					
150	30	5	20	0	263					
175	30	5	20	0	334					
200	30	5	20	0	416					
250	30	5	20	0	607					
300	30	5	20	0	830					
350	30	5	20	0	1,100					
400						30	5	20	0	1,385
500						30	5	20	0	2,091

Recommended sizes

In the event of lateral displacement and simultaneous axial extension (due to installation gap tolerance) the above movements are reduced (▶ page 29).

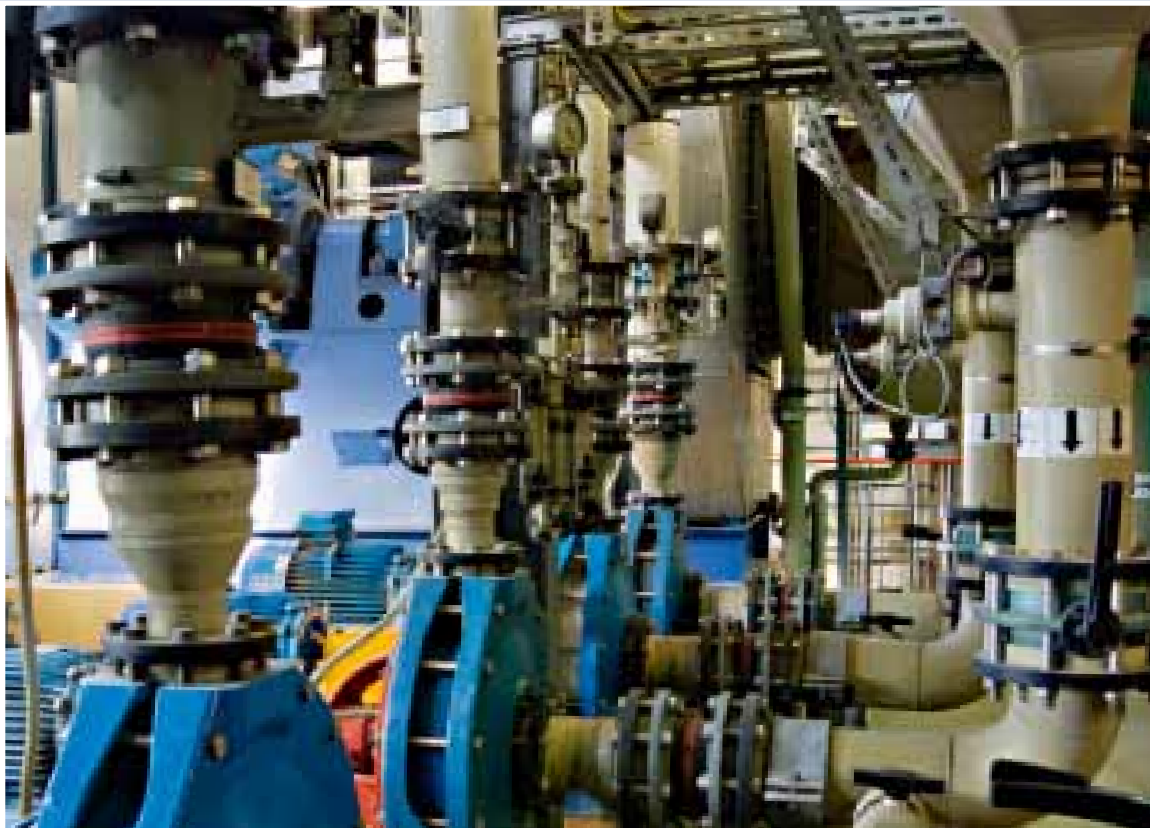

Universal expansion joint, type D110A
 on the pump suction side DN 250, 10 bar
 on the pump discharge side DN 150, 10 bar